

FULLSTRIKE LTD

www.fullstrikegroup.com



Smart Home





Intelligent visual doorbell WF001

- built-in lithium battery 1 21700 4800mAh
- 2-megapixel sensor
- Four 5mm 850nm LED lamps
- Support TF card storage (up to 128G in cloud storage)
- 2.4G WIFI IEEE802. 11b/g/h
- IP65 waterproof
- 140° viewing angle
- Support HD, SD and mirror image settings.



Support voice calls, PIR mobile detection, device sharing, doorbell sharing with family and friends, and online preview and video viewing. Video recording, SD card storage or cloud storage can be used to record every moment. The powerful night vision function will not be dark at night.

Wireless video buzzer, Wi-Fi Winees, Hd 1080p security camera, internal buzzer, 170° wide angle field, waterproof, night vision, two-way audio, easy to install, compatible with Alexa.

1080p Full HD and bidirectional audio Full HD resolution of winees 1080p provides ultra-clear images. The widest viewing angle of 170° provides the best motion detection performance. You can use your smartphone to talk to people ringing the doorbell in real time.

Intelligent PIR and IP 65 waterproof motion detection: the buzzer camera with built-in PIR motion sensor detects the minimal movement in front of the door. When someone passes by, your cell phone will send a notification. Check for suspicious activity anytime, anywhere.

2.4G Wi-Fi and Night Vision: the smart video buzzer camera only supports 2.4GHz Wi-Fi (5GHz Wi-Fi is not supported). The recommended network environment is 32 KB to S-2 MB.

Free wireless remote control application and buzzer: with the intelligent video buzzer winees camera, you can remotely control and play videos anytime and anywhere via the encrypted cloud service to ensure your family safety. The buzzer supports 58 interesting ringtones and adjustable volume.

Secure cloud storage and local storage: the video buzzer uses financial encryption and supports 128g micro SD storage (not included) and cloud storage; It protects your privacy as much as possible and prevents your data from leaking. No matter where you are, don't miss the moment of using encrypted cloud services to play videos remotely.

Note: Products with plugs are intended for use in the United States. U.S.A. The outlet and voltage are different at the international level. This product may require an adapter or converter to be used at the destination. Check compatibility before purchase.







Smart Home Video Doorbell Monitoring HD Camera Wireless WiFi Smart Doorbell Camera Camera FSL-DC100

Smart WiFi Door Camera Wi-Fi Connection FULL HD1080P Video Night Vision PIR Motion Detection Two-way Audio


- * CPU: RTL8715
- * Image Sensor: PrimeSensor Color CMOS 2.0MP
- * Lens Aperture F=2.4 Viewing angle: 110 degree
- * Internal memory: 8MB SPI (not for end user)
- * Battery type 18650 rechargeable lithium battery x 2 pcs
The package did not include this 18650 battery.



Smart Home Video Doorbell Surveillance HD Camera Video WiFi camera Smart Doorbell Camera FSL-DC200

Smart WiFi Door Camera Wi-Fi Connection FULL HD1080P Video Night Vision PIR Motion Detection Two-way Audio


- * CPU: RTL8715
- * Image Sensor: PrimeSensor Color CMOS 2.0MP
- * Lens Aperture F=2.4 Viewing angle: 110 degree
- * Internal memory: 8MB SPI (not for end user)
- * Battery type 18650 rechargeable lithium battery x 2 pcs
The package did not include this 18650 battery.







Smart WiFi Door Camera Wi-Fi Connection FULL HD1080P Video Night Vision PIR Motion Detection Two-way Audio Video Doorbell Chime Music Receiv FSL-IOT-L003 1080P

CPU: RTL8715
Image Sensor: PrimeSensor Color CMOS 2.0MP
Lens Aperture F=2.4 Viewing angle: 110 degree
Internal memory: 8MB SPI (not for end user)
Battery type 18650 rechargeable lithium battery x 2 pcs
The package didnot include this 18650 battery.



Graffiti doorbell 720P wireless WIFI can only visual intercom doorbell tuyu electronic cat-eye without hole punching door mirror FSL-IOT-L002 720P

*CPU: T31
* Image Sensor: PrimeSensor Color CMOS 1.0MP
* Lens Aperture F=2.4 Viewing angle: 110 degree
* Internal memory: 8MB SPI (not for end user)
* Battery type 18650 rechargeable lithium battery x 2 pcs






Tuya Smart WIFI Graffiti Visual Smart Night Light Doorbell Camera Low Power Voice Alarm Camera FSL-C900A


Smart WiFi Door Camera Wi-Fi Connection FULL HD1080P Video Night Vision
PIR Motion Detection Two-way Audio

- * CPU: Hisilicon Hi3518E v200
 - * Image Sensor: PrimeSensor Color CMOS 2.0MP
 - * Lens Aperture F=2.4 Viewing angle: 110 degree
 - * Internal memory: 8MB SPI (not for end user)
 - * Battery type 18650 rechargeable lithium battery x 2 pcs
- The package did not include this 18650 battery.



Factory wholesale hotel apartment residential electronic smart door lockanti-theft door APP homestay temporary password smart lock FSL-FP01

Tuya Bluetooth Fingerprint
Fingerprint Sensor: Semiconductor fingerprinting
Fingerprint shape: Square 10.4*10.4mm
Storage capacity: Ten sets of prints
Batteries: Lithium battery 200mAh 3.7V
Charging current: 5V/200MA





Home smart anti-theft door lock_ Hotel apartment password card smart lock Tuya APP remote control door lock FSL-WD035

Smart WiFi Door Lock (waterproof)

Material: aluminum alloy

Color: Black & Silver


Lock cylinder grade: Grade C

Fingerprint capacity ≤ 150

Password capacity ≤ 150

Battery type: 4 No. 5 dry batterie

Voice control by Alexa & Google Home



Home smart anti-theft door lock Hotel apartment password card smart lock Tuya APP remote control door lock FSL-WD034

Smart WiFi Door Lock

Material: aluminum alloy

Color: Black & Gold

Lock cylinder grade: Grade C

Fingerprint capacity ≤ 150

Password capacity ≤ 150

Battery type: 4 No. 5 dry batteries

Voice control by Alexa & Google Home





Bluetooth smart fingerprint lock Indoor room home anti-theft door lock Intelligent fingerprint electronic door lock FSL-DL100

Smart Bluetooth Door Lock

System: Tuya Apps

function: app fingerprint password card swiping key Bluetooth unlocking

material: aluminum alloy integrated

size: 59mm * 130mm * 32mm

fingerprint type: FPC 160x160 power



supply mode: 4pcs 5 AA batteries

Fingerprint quantity: 50

cards quantity: 50

keys quantity: 2

cards quantity: 2



Bluetooth smart fingerprint lock Indoor room home anti-theft door lock Intelligent fingerprint electronic door lock FSL-DL200

Smart Bluetooth Door Lock

System: Tuya Apps

function: app fingerprint password card swiping key Bluetooth unlocking

material: aluminum alloy integrated

size: 168mm * 68mm * 25mm

fingerprint type: FPC 160x160 power


supply mode: 4pcs 5 AA batteries

Fingerprint quantity: 50

cards quantity: 50

keys quantity: 2

cards quantity: 2





Smart Door Lock FSL-IOT-L007



Number of Keys	2
Scratch-Proof keypad	√
Battery	AAA*4 (Excluded)
Emergency Power	Type C
Battery Life	12 months
Working Temperature	-20°C-65°C
Working Humidity	20%-93%RH
Material	Zinc Alloy
Color	Black
Size of front handel	150mm*50mm*28mm
Size of back handel	150mm*50mm*28mm
Net Weight (batteries excluded)	565g
Suitable door thickness	35 to 50mm
Backset	60 or 70mm
Suitable type of door	Wooden door
Material of latch	Zinc Alloy
Type of latch	Single latch
Length of latch	Adjustable latch 60, 70mm
Suitable for left hand door and right hand door	√
Protocol	BLE 5.0
Number of fingers	50
False Acceptance Rate	< 0.001%
Rejection Truth Rate	< 1%
Number of Codes	100
Number of Digits for each code	6 to 10 digits





Keypad FSL-IOT-L005

Wireless	BLE	BLE	BLE 5.0
		2.4GHz	2.4G
Power	DC	Power Supply	4*AAA
		Endurance	6 months (Lock and Unlock 10 times a day at normal temperature)
Others	Operating Temperature	-20 to 45 degree Celsius	-20°C ~ 50° (-4°F ~ 122°F)
	Green	Recycle Package	Yes
	Warranty	1 year	1 year
	Languages of APP&User Manual	English (US,UK)	English (US,UK)
	Dimensions	Lx W x H	1.6 in.x 4.7in. x 0.96in.
			40.0mmX120.5mmX24.5mm
	Weight	Battery free	2.19oz; 62g
	In The Box	Keypad	x 1
		Battery	4*AAA
		Drill Bit	x 1
		Screwdriver	x 1
		Acxeon screws	x 6
		Wall anchors	x 4
		Installation Guide	x 1
	The Box	Dimension(mm)	148mmX80.5mmX65mm
		Net Weight	223g; 7.9Oz
Certifications	Regulatory	CE (coming in mid of October)	
Requirements	1. Working with Bosma Smart Door Lock 2.Must be paired with a Wi-Fi gateway		
Verification method	Amount of passcodes that could be saved	Fixed passcodes	50
		Temporary passcodes	
		Characters Length	6-10 Digits
		Virtual passcodes	Support 20 virtual codes (Adding random numbers before and after the correct password)
Lock &Unlock	Unlock	Enter passcode + press Unlock to unlock	
	Lock	Press Lock to lock	
Trial and error	Trial and error detection	Passcodes trial and error detection	support
	Trial and error protection	Passcodes trial and error protection	Ater 10 times of consecutive recognition failing, the keyboard input would be blocked for 10 minutes. After 10 minutes, the keyboard input would be released again.
	Trial and error reminder	Trial and error reminder	When keypad is blocked, the app would send notifications to the user.
Status indication	Light	Indicator light	Red light + blue light
	Sound	keypad tone	voice

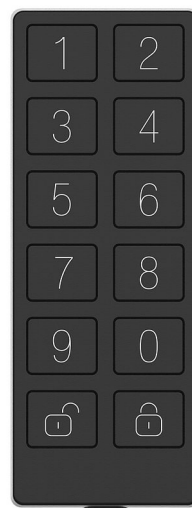



Door Lock FSL-IOT-L004

Net Weight	187g without batteries
Color Box Weight	795.9g
	Smart Lock x 1 Screw x 2 AA Battery x 4 Lock Adapter x 4 Adhesive Strip x 1 Mounting Plate x 1 Euro Cylinder x 1 Keys of Cylinder x 2 Installation Guide x 1
Power Supply	4 AA batteries
Battery Life	6 months
Auto Unlock	Support
Auto-lock	Support
APP Unlock & Lock	Support
Remote Unlock & Lock	Support
Keypad Unlock & Lock	Support
Manual Unlock	Support
Physical Key Unlock	Support
Family Management	Support
Guest Keys	Support
Keypad Guest Keys	Support
Activity History & Notifications	Support
Compatibility	Single-cylinder deadbolt
iOS/Android	Support
Connectivity Bluetooth & Wi-Fi (with Gateway)	YES
Alexa & Google Assistant	Works with
Materials	ABS
Dimensions	Diameter: 71 mm (2.79 in.) Depth: 67 mm (2.64 in.)





AEGIS SMART LOCK FSL-IOT-L006

Wireless connection	Bluetooth	BLE 5.0
	Band of Frequency	2.4GHz
Multi-layer security STANDARD	AES-128 bit	for data encryption
	MD5 + Salt	for account & password encryption
	TLS	for communications security
	Security Level	standards are comparable with those of the online banking sector
Unlock Operation	Auto-Unlock	with mobile phone's BLE connection with Aegis, unlock the door when you arrive
	Remotely Access	with Acxeon gateway hub
	App Unlock	You can log into your web account to unlock on Acxeon App
Guest access	Tuya APP Guest Access	Guest needs to access with Acxeon APP, invited by Aegis owner user and get a temporary access right
	Remotely Access	Connected with a Keypad, user could unlock the door by passwords Connected with an Acxeon Wi-Fi Hub/Bridge, the owner could unlock the door remotely via App, for Guest Access.
Power of Aegis	Power supply	4 x AA batteries . Aegis Smart Lock works with four standard AA batteries.
	Average battery life	around 6 months , depends on the frequency of locking /unlocking operation
Using Statement	Secure level	online bank grade
	Low power Notifications	when the battery power <= 20% capacity, low-battery notifications will be pushed to your phone frequently until you replace the batteries .
	Lock type compatibility	Single-Cylinder Deadbolt Lock
	Auto-lock	When the door is closed, Aegis will automatically lock
	Emergency situation	When Aegis Smart Lock with no battery power , you can also unlock your door with your normal key.
	Privacy protection	AES-256 encryption for Fingerprint data Fingerprint data will be encrypted and stored in local Fingerprint Module, not in Acxeon Cloud. And the data will be completely erased after Fingerprint Module being reset.
Skills & Service	works with Alexa	use Alexa devices to voice control the Aegis, for lock/unlock and check the status of it.
	Google assistance	use Google voice device to voice control the Aegis, for lock/unlock the Aegis, and check the status of it.
Physical	Dimension(mm)	88(L)X88(W)X66(H)
	Material	AL+ABS
	Color	Sliver+ Grey
	Net Weight	340g(without battery)
Aegisense	G-Meter	Support
	Gyroscope	Support
Environment	Operating Temperature	-10°C ~ 50° (14°F ~ 122°F)
	Operating Humidity	20% ~85% non-condensing
Others	Update	OTA background update
	Reset	Reset button is available
		one-key 'away' mode setting
	ACXEON APP	Android and iOS
	Operating Systems	Android 5 and IOS 11 or higher (support Bluetooth 4.0BLE)
Package(KIT)		ACXEON Smart Lock *1 AA Battery*4 Lock adapter*3 Adhesive Strip*1 Installation manual*1 Desiccant*1
	Dimension(mm)	120*120*92mm
	Net Weight	650g
Carton box	Dimension(mm)	40.8*25.8*27.2cm
	Quantity	12
	GW	9.62KGS
	NW	4.68KGS
Certification		CE, FCC, MIC, RoHS





Bluetooth smart spherical fingerprint lock_Indoor room home anti-theft door lock_Intelligent fingerprint electronic door lock FSL-WD023

Smart Bluetooth Door Lock

Mechanical KeysPower: 4*AAA Batteries Finge

Working Temperature: -20-55°C

PIN Length: 4-6 Digits

Idle Current: <25UA

Working Current: <120MA

Dimensions: L165*W29*D65.5(mm)

Shipping Weight: 1.2KG

5



➔ Smart Light Bulb

- One-key on/off with your smartphone
- Life: 26280 hours
- Luminous color: RGB/white
- Power consumption: 10w
- Wireless frequency: 2.4GHz
- Wireless standard: IEEE 802.11b/g/n
- Wi-Fi distance: 45M
- Product Size: 60mm*60mm*113mm



FE-E037W





FE-C066W/W

➡ Motion Sensor

- Motion detection
- Battery: CR123A x 1
- Standby current: 34uA
- Operate current: 75mA~90mA
- Working time: 1 year (7 times/day); 2 years (3 times/day)
- Sensitivity distance: 6m
- Sensitive angle: 110°
- Wireless Type: 2.4GHz
- Protocol: IEEE 802.11b/g/n
- Wireless Range: 45m
- Product Size: 48mm*48mm*48mm

➡ USB Motion Sensor

- Motion detection;Push notification to mobile phone;
- With temperature and humidity sensor,it can alarm by app setting
- Anti-demolition function,push notification when device is removed
- Battery:CR123A*2-3V
- USB Power supply :5V 1A
- Standby current :39.7uA
- Wireless frequency: 2.4GHz
- Wireless standard: IEEE 802.11b/g/n
- Wi-Fi range: 45M
- Sensitive angle: 110°
- Sensitive distance: 12m
- Product Size: 68mm*56mm*56mm



FE-C067W





FE-C0931Z/02Z

➡ Motion Sensor(PIR)

- Motion detection

- Compatible with 500 series and 700 series
- Power supply: CR123A×1
- Standby current: 16uABattery life:1 years
- Detection range: 7 meters
- Viewing angle: 110 degree
- Operation temper: 0-40°C
- Radio Frequency: 868.40MHz EU; 908.40MHz US
- Range: 70m outdoor; 50m indoor
- Product size: 45mm*45mm*48mm



➡ Motion Sensor

- Motion detection;Push notification to mobile phone
- With temperature and humidity sensor
- Anti-demolition function,push notification when device is removed

- Compatible with 500 series and 700 series
- Battery: CR123A x 2-3V
- USB Power supply: 5V/1A
- Standby current: 39.7uA
- Sensitive angle: 110°
- Sensitive distance:12m
- Radio frequency: 868.40MHz EU; 908.40MHz US
- Range: 70m outdoor; 50m indoor
- Product size: 68mm*56mm*56mm



FE-C094





➔ USB Motion Sensor

- Motion detection;Push notification to mobile phone
- With temperature and humidity sensor,it can alarm by app setting
- Anti-demolition function,push notification when device is removed
- Backup battery: CR123A*2-3V
- USB Power supply: 5V 1A
- Sensitive distance: 12m
- Sensitive angle: 120°
- Working Temperature: 0°C ~ 40°C (32°F ~ 104°F)
- Working humidity: 20% ~ 85%
- Wireless frequency: 2.4GHz
- Wireless protocol: Zigbee 3.0, IEEE 802.15.4
- Network range: 55M
- Product size: 68mm*56mm*56mm



FE-C084B

➔ Smart Mousetrap

- High voltage shock mouse after triggering
- Easy to install,put at any location you want.
- Battery : 1.5V AA Size × 4 (6V)
- Working time: 15times
- Standby current: 22uA
- Max current: 600mA
- Wireless Type: 2.4GHz
- Protocol: IEEE 802.11b/g/n
- Wireless Range: 45m
- Product Size: 222mm*112mm*120mm



FE-C079W





Door Sensor

Product Size

Main body: 71mm*21mm*22mm

Deputy body: 40mm*11mm*11mm



FE-C06801W

- Detect open/close status of the door/window
- Battery: CR2 x 1
- Standby current: 13uA
- Working current: 75mA-90mA
- Working time: 1 year (7 times/day)
2 years (3times/day)
- Wireless Type: 2.4GHz
- Protocol: IEEE 802.11b/g/n
- Wireless Range: 45m



Amazon alexa



Google Assistant

USB Door Sensor

Product Size

Main body: 87mm*27mm*23mm

Deputy body: 50mm*13mm*16mm

- Detect open/close status of the door/window
- Anti-demolition function and push notification
- Backup Battery: CR123A 3V
- USB Power supply :5V 1A
- Standby current :27.9uA
- Wireless frequency: 2.4GHz
- Protocol: IEEE 802.11b/g/n
- Wi-Fi range: 45M



Amazon alexa



Google Assistant



FE-C071W





Product Size

Main body: 82mm*42mm*16mm

Deputy body: 82mm*11mm*16mm



FE-C070W

- Detect open/close status of the door/window
- Battery type: AA*2
- Stand by current: 28.4uA
- Trigger current: 43mA
- Pairing current: 37mA
- Working time: 4000 times
- Wireless type: 2.4GHz
- Protocol: IEEE 802.11b/g/n
- Wireless range: 35M



Door Sensor

- Detect the open/close status of doors and windows, and push notifications to mobile phones

- Power supply: AA*2
- Standby current: 6.5uA
- Working temperature: 0°C ~ 40°C
- Working humidity: 20% ~ 85%
- Working times: 5000
- Wireless frequency: 2.4GHz
- Wireless protocol: Zigbee 3.0, IEEE 802.15.4
- Network range: 55M
- Product size: Main body: 82mm*42mm*16mm
Deputy body: 82mm*11mm*18mm



FE-C085B





FE-C095

➡ Door Sensor

- Detect open/close status of the door/window
- Compatible with 500 series and 700 series
- Standby current: 2uA
- Battery life: 2 years
- Operation temperature: 0-40°C
- Radio Frequency: 868.40MHz EU;
908.40MHz US
- Range: 70m outdoor; 50m indoor
- Product size:
Main body: 71mm*21mm*22mm
Deputy body: 40mm*11mm*11mm

➡ Door Sensor

- Detect open/close status of the door/window
- Anti-demolition function and push notification
- Compatible with 500 series and 700 series
- Backup battery: CR123 × 1
- USB Power supply: 5V/1A
- Standby Current: 8uA
- Work Current: Up to 15mA
- Operation Temperature: 0°C~70°C
- Radio frequency: 868.40MHz EU;
908.40MHz US
- Range: 70m outdoor; 50m indoor
- Product size:
Main body: 82mm*27mm*23mm
Deputy body: 50mm*13mm*16mm



FE-C096





FE-C086B

➡ USB Door Sensor

- Detect the open/close status of doors and windows, and push notifications to mobile phones
- Anti-demolition function, push notification when device is removed
- Backup battery: CR123A 3V
- USB Power supply: 5V 1A
- Standby current: 10.7uA
- Working Temperature: 0°C ~ 40°C (32°F ~ 104°F)
- Working humidity: 20% ~ 85%
- Wireless frequency: 2.4GHz
- Wireless protocol: Zigbee 3.0, IEEE 802.15.4
- Network range: 55M
- Product size: Main body: 82mm*27mm*23mm
Deputy body: 50mm*13mm*16mm





FE-E035W

➡ Power Plug(EU/FR)

- One key ON/OFF appliances
- Timing ON/OFF
- Set delayed tasks
- Instant current voltage power and power consumption display with APP
- Rated Voltage: AC 85~240V, 50/60Hz
- Rated Current: EU 10A/16A; FR 10A/16A
- Wireless Type: 2.4GHz
- Protocol: IEEE 802.11b/g/n
- Product Size: EU 65mm*43mm*43mm
FR 65mm*43mm*43mm



Amazon alexa



Google Assistant

➡ Power Plug US

- One key ON/OFF appliances
- Timing ON/OFF
- Set delayed tasks
- Instant current voltage power and power consumption display with APP
- Rated Voltage: AC 85~240V, 50/60Hz
- Rated Current: 15A
- Wireless Type: 2.4GHz
- Protocol: IEEE 802.11b/g/n
- Product Size: 81mm*38mm*52mm



FE-E036W





FE-E041ZE/ZU



➡ Power Plug(EU/US)

- ON/OFF control
- Measuring voltage, current, instant power, accumulated power
- Compatible with 500 series and 700 series
- Input voltage: 85V~265V AC, 50/60HZ
- Max current: 13A
- Operation temperature: 0-40°C
- Radio Frequency: 868.40MHz EU; 908.40MHz US
- Range: 70m outdoor; 50m indoor
- Product size:
US 43mm*43mm*45mm
EU 43mm*43mm*65mm



➡ Power Plug(UK/AU)

- Remote control appliance power ON/OFF on mobile-phone App
- Measuring voltage, current, instant power, accumulated power
- Compatible with 500 series and 700 series
- Input voltage: 85~265V AC 50/60Hz
- Maximum current: 13A
- Operating temperature: 0-40°C
- Radio Frequency: 868.4MHz UK; 921.4MHz AU
- Range: 70m outdoor; 50m indoor
- Product size:
UK 58mm*58mm*55mm
AU 54mm*54mm*52mm



FE-E042ZE/ZU





FE-E038B

➡ Power Plug EU

- One-key on/off, Timing on/off, Set delayed tasks
- Real-time current and voltage, power metering
- Input power: AC 85~240V 50/60Hz
- Maximum current: 16A
- Standby power consumption: 0.5W
- Working temperature: 0°C ~ 40°C (32°F ~ 104°F)
- Working humidity: 20% ~ 85%
- Wireless frequency: 2.4GHz
- Wireless protocol: Zigbee 3.0, IEEE 802.15.4
- Wireless distance: 55M
- Product size: 46mm*46mm*71mm





FE-E046AI

INDOOR
720P



- Mega Pixels CMOS Sensor
- Motion detection, alarm push notification
- TUYA Smart Server
- Support for cloud platform, horizontal rotation 330 °, vertical rotation 120 °
- Image Frame Rate: 25fps
- Night vision: 8 IR LED, 5-10m
- Support IEEE 802.11/b/g/n
- Support up to 64G TF card

FE-E047AI

INDOOR
720P



- Mega Pixels CMOS Sensor
- Motion detection, alarm push notification
- TUYA Smart Server
- Image Frame Rate: 25fps
- Night vision: 8 IR LED, 5-10m
- Support IEEE 802.11/b/g/n
- Support up to 64G TF card





FE-E048AI

OUTDOOR
720P



- Mega Pixels CMOS Sensor
- Motion detection, alarm push notification
- TUYA Smart Server
- Image Frame Rate: 25fps
- Night vision: 20 IR LED, 10-15m
- Support IEEE 802.11/b/g/n
- Support up to 64G TF card

FE-E045RQ

INDOOR
1080P



- 2 Mega Pixels CMOS Sensor
- Motion detection, alarm push notification.
- TUYA Smart Server;
- Support for cloud platform, horizontal rotation 355 °, vertical rotation 155 °
- Image Frame Rate: 25fps
- Night vision: 2 IR LED, 5-10m
- Support IEEE 802.11/b/g/n
- Support up to 64G TF card





FE-E044RQ

OUTDOOR
1080P



- 2 Mega Pixels CMOS Sensor
- Motion detection,
alarm push notification.
- TUYA Smart Server;
- Support for cloud platform,
horizontal rotation 355 °,
vertical rotation 155 °
- Image Frame Rate: 25fps.
- Night vision: 6 IR LED, 5-10m
- Support IEEE 802.11/b/g/n
- Support up to 64G TF card





FE-C060W

➡ Light Switch EU

- One key ON/OFF lights
- Timing ON/OFF
- App Remote Control
- Rated Voltage: AC 85~240V, 50/60Hz
- Max Current: 1 outputs - Max 5A*1;
2 outputs - Max 5A*2;
3 outputs - Max 5A*3.
- Wireless Type: 2.4GHz
- Protocol: IEEE 802.11b/g/n
- Product Type: 1 / 2 / 3 way
- Product Size: 86mm*86mm*34mm



Amazon alexa



Google Assistant

➡ Light Switch US

- One key ON/OFF lights
- Timing ON/OFF
- App Remote Control
- Rated Voltage: AC 85~240V, 50/60Hz
- Max Current: 16A/channel
- Wireless Type: 2.4GHz
- Protocol: IEEE 802.11b/g/n
- Product Type: 1 / 2 / 3 way
- Product Size: 74mm*37mm*120mm



FE-C061W



Amazon alexa



Google Assistant





FE-C062W

➔ Dimmer Switch EU

- Timing switch, Intelligent open, Adjust lighting intensity
- Power metering
- Widely compatible with Mos-FET
- Input: AC 85~240V, 50/60Hz
- Output: 200W
- Over-temperature protection: 90°C
- Operate mode: touch screen
- Wireless Type: 2.4GHz
- Protocol: IEEE 802.11b/g/n
- Wireless Range: 45m
- Product Size: 86mm*86mm*34mm



Amazon alexa



Google Assistant

➔ Dimmer Switch US

- Timing switch, Intelligent open, Adjust lighting intensity
- Power metering
- Widely compatible with Mos-FET
- Input: AC 85~240V, 50/60Hz
- Output: 200W
- Over-temperature protection: 90°C
- Wireless Type: 2.4GHz
- Protocol: IEEE 802.11b/g/n
- Wireless Range: 45m
- Product Size: 110mm*58mm*50mm



FE-C063W



Amazon alexa



Google Assistant





FE-C064W

➡ Light Switch US

- One key ON/OFF lights
- Timing ON/OFF
- Input Power:100~120VAC 60Hz
- Control:Relay
- Wireless Type: 2.4GHz
- Protocol: IEEE 802.11b/g/n
- Control Channel:1CH Max
- Current:15A Standby
- Power:≤0.5W
- Button Life:500K times
- Product Size:105mm*45mm*45mm



Amazon alexa



Google Assistant

➡ Dimmer Switch US

- Timing switch,Intelligent open,Adjust lighting intensity
- Power metering
- Widely compatible with Mos-FET
- Input Power:100~240VAC 50-60Hz
- Dimming Control: TRIAC Edge Cut
- Inductive load(LED/CFL):250W Max
- Resistive load(Incandescent):430W Max
- Communication: WiFi 802.11 b/g/n 2.4GHz Control
- Channel:1CH Max Current:7A
- Standby Power:≤0.5W
- Button Life:500K times
- Product Size:105mm*45mm*45mm



FE-C065W





FE-C08901/02Z

➡ Light Switch(EU/US)

- One key ON/OFF lights; Timing ON/OFF; App Remote Control
- Operating mode: touch-sensitive
- Power specification: 110~230V AC \pm 10%, 50/60Hz
- Max Current: 1 outputs - Max 5A*1;
2 outputs - Max 5A*2;
3 outputs - Max 5A*3.
- Product Type: 1 / 2 / 3 way
- Operate temper: 0°C-40°C(32°F-104°F)
- Operating humidity: 20%-85% non-condensing
- Radio frequency: 868.40MHz EU; 908.40MHz US
- Wireless distance: 70m outdoor; 50m indoor
- Product size: EU 86mm*86mm*34mm
US 120mm*74mm*37mm

➡ 2 Way Light Switch



- One key ON/OFF light; Timing ON/OFF;
- App Remote Control
- Power: 80~250VAC, 50/60Hz
- Current Output: 10A
- Power consumption: 1.2W
- Power Output: 2000W
- Operating mode: touch-sensitive
- Working temperature: 0-70°C
- Wireless protocol: Z-Wave
- Wireless frequency: 868.40MHz EU; 908.40MHz US
- Wireless range: 70m outdoor; 50m indoor
- Product size: 86mm*86mm*34mm




FE-C0901 A/B





➡ IR Remote Controller

- Support all infrared devices, including air conditioner, TV, fan, DVD player, etc
- Support Amazon Alexa/Echo/Dot/Google Home
- Learning (DIY)- controls all devices that use infrared signals;
- USB power supply: 5V 1A
- Infrared Frequency: 38-56Khz
- Infrared Distance: 7M
- Infrared Angle: 360°
- Max Current: 110mA
- Max Power: 0.55W
- Wireless Type: 2.4GHz
- Protocol: IEEE 802.11b/g/n
- Wireless Range: 45m
- Product Size: 60mm*60mm*19mm

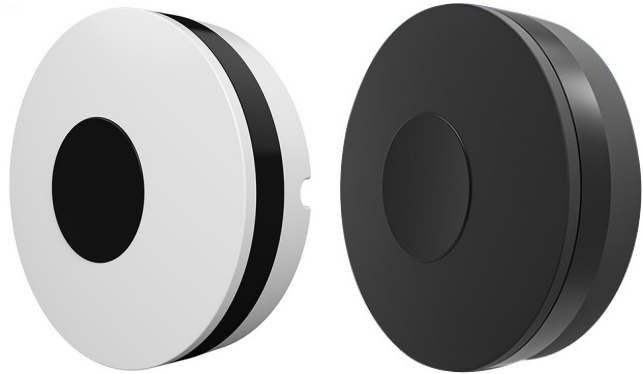

FE-C076



➡ IR Remote Controller

- Support all infrared devices, including air conditioner, TV, fan, DVD player, etc
- Support Amazon Alexa/Echo/Dot/Google Home
- Learning (DIY)- controls all devices that use infrared signals;
- USB power supply: 5V 1A
- Infrared Frequency: 38-56Khz
- Infrared Distance: 7M
- Infrared Angle: 360°
- Max Current: 110mA
- Max Power: 0.55W
- Wireless Type: 2.4GHz
- Protocol: IEEE 802.11b/g/n
- Wireless Range: 45m
- Product Size: 67mm*67mm*24mm



FE-C077W





FE-C081W

➡ ZigBee Gateway

- ZigBee control center,
- Supports adding multiple sub-devices
- USB power supply: 5V 1A
- Working temperature: -10-55°C
- Working humidity: 10%-90%RU
- Storage temperature: -10-55°C
- Storage humidity: 10%-90%RU
- Wireless protocol: Zigbee 3.0, IEEE 802.15.4
- Network range: 55M
- Firmware upgrade: Support OTA
- Product size: 78mm*78mm*25mm

➡ Temperature and humidity sensor



- With temperature and humidity sensor
- Detect luminous intensity
- Push notification to mobile phone
- Battery: AA*2
- Temperature detect range: -20°C ~ 80 °C
- Humidity detect range: 0% ~ 100%
- Luminous intensity detect range: 0Lux ~ 157000Lux
- Working temperature: -20°C ~ 80°C (-4°F ~ 176°F)
- Working humidity: 0% ~ 100%
- Wireless frequency: 2.4GHz
- Wireless protocol: Zigbee 3.0, IEEE 802.15.4
- Network range: 55M
- Product Size: 84mm*55mm*32mm



FE-C082B





FE-C07202/03W

➡ Siren Alarm 3in1

- Trigger alarm , make sound and light
- Siren with humidity and temperature sensor
- Multiple Sound Selection
- USB Power supply: 5V 1A
- Backup power supply: CR123A x 2 (optional)
- Sound intensity: 90dB
- Wireless Type: 2.4GHz
- Wireless standard: IEEE 802.11b/g/n
- Wireless Range: 45m
- Product Size: 68mm*68mm*32mm



Amazon alexa



Google Assistant

➡ Temperature and humidity sensor

- With temperature and humidity sensor
- Detect luminous intensity
- Push notification to mobile phone
- Battery: AA*2
- Temperature detect range: -20°C ~ 80 °C
- Humidity detect range: 0% ~ 100%
- Luminous intensity detect range: 0Lux ~ 157000Lux
- Working temperature: 0°C ~ 60°C
- Working humidity: 0% ~ 100%
- Bluetooth network: 2.4GHz IEEE801.11b/g/n
- Wireless frequency: 2.4GHz
- Wireless protocol: IEEE 802.11b/g/n
- Network range: 45M
- Product Size: 84mm*55mm*32mm



FE-C073W





FE-C0921Z/02Z

➤ Siren Alarm

- Trigger alarm, make sound and light
- Compatible with 300 series and 500 series
- 10 sound can be select
- Battery: CR123A x 2
- USB power supply: 5V, 1A(NAS-AB02Z only)
- Stand-by time: 1 year
- Sound intensity: 100dB
- Operation temperature: 0~40°C
- Radio Frequency: 868.40MHz EU; 908.40MHz US
- Range: 70m outdoor; 50m indoor
- Product size: 68mm*68mm*33mm



➡ Siren Alarm

- Trigger alarm; Make sound and light; Remote on/off via APP
- Siren with humidity and temperature sensor ; Set the temperature and humidity alarm range that automatically alarms
- Backup Battery: CR123A*2-3V
- USB Power supply: 5V 1A
- Volume: 90db
- Working Temperature: 0°C ~ 40°C (32°F ~ 104°F)
- Working humidity: 20% ~ 85%
- Wireless frequency: 2.4GHz
- Wireless protocol : Zigbee 3.0, IEEE 802.15.4
- Network range: 55M
- Product Size: 68mm*68mm*33mm



FE-C083B





FE-C0911Z/02Z

➡ Water Sensor

- Flood detection
- Compatible with 500 series and 700 series
- Battery: CR2×1
- Standby current: 2uA
- Battery Life: 2 years
- Operation Temperature: 0-40°C
- Radio Frequency: 868.40MHz EU; 908.40MHz US
- Range: 70m outdoor; 50m indoor
- Product size: 68mm*68mm*34mm



➡ Water Sensor

- Detect water leakage and push alarm to smartphone
- App remote control
- Battery: CR2 x 1
- Standby current: 1.1uA
- Standby time: 5 years
- Working time: 4 years (2 times/month)
- Wireless Type: 2.4GHz
- Protocol: IEEE 802.11b/g/n
- Wireless Range: 45m
- Protection grade: IP55
- Product Size: 67mm*67mm*24mm



FE-C074W





FE-C0872B

➡ Water Sensor

- Detect water leakage and push notification to mobile phone
- App remote control
- Battery: CR2-3V
- Standby current: 1.1uA
- Waterproof level: IP55
- Working Temp.: 0°C~40°C
- Working hum.: 20%~85%
- Wireless frequency: 2.4GHz
- Wireless protocol:
Zigbee 3.0, IEEE 802.15.4
- Network range: 55M
- Product size: 69mm*69mm*34mm

- Detect water leakage and push smart phone to alarm
- App remote control
- Power supply: AA*2PCS
- Working current: 58mA
- Standby current: 2.5uA
- Working temp.: 0°C ~ 50°C
- Working hum.: 20% ~ 85%
- Working times: 5000
- Wireless frequency: 2.4GHz
- Wireless protocol:
Zigbee 3.0, IEEE 802.15.4
- Network range: 55M
- Product size: 82mm*42mm*16mm



FE-C0885B





FE-C075W

➡ Water Sensor

- Detect water leakage and push alarm to smartphone
- Power: AA*2
- Working current: 37mA
- Pairing current: 36mA
- Standby current: 23.5uA
- Alarm time: 10 minutes
- Wireless frequency: 2.4GHz
- Wireless standard: IEEE 802.11b/g/n
- Wi-Fi distance: 35M
- Product Size: 82mm*42mm*16mm



Amazon alexa



Google Assistant

➡ Water valve

- Water pressure ,Water Flow , Water Temperature measurement
- One click test for water leakage
- Adapter: Input: 100-240V~ 50/60Hz, 0.3A max; Output: 5V 1.0A
- Wireless standard: IEEE 802.11b/g/n @ 2.4GHz
- Main water supply line: 1" ; 3/4"
- Thread pitch/pattern: 1"-11.5NPS; 3/4"-14NPS
- Water Flow Rate: 1"---0.11~34.3gal/min; 3/4"---0.07~22gal/min
- On/Off time: 8 seconds
- Water pressure: 20-100 psi Accuracy : ±2.5%
- Water Temperature: -10°C ~ 65°C (14F ~ 149F)
- Relative humidity: 10-80%
- Product life: >90 , 000 operating hours (10 years)
- Product Size: 195mm*70mm*90mm



FE-C080W





FE-C078W

☛ Smoke Sensor

- Detect smoke;issue alert;push notifications to smartphone
- Battery: CR2*2
- Sleep current: 25uA
- Operating current: 100mA~110mA
- Standby time: 5 years
- Working time: 1 year (20 times/day)
- Wireless type: 2.4GHz
- Protocol: IEEE 802.11b/g/n
- Alarm temperature: >55°C
- Sound intensity: 90db(1M)
- Product Size: 71mm*71mm*29mm



About Us

✉ sales@fullstrikegroup.com

www.fullstrikegroup.com



Office: Room 302, T3, Taiziwan Commercial Building, Cruise Avenue, Nanshan District, Shenzhen, China 518067.

Factory: NO.123,Jinghui west Rd,Investment entrepreneuFSLip center,Xaying,Ynzhou,Ningbo,China.

Germany Office: Robinson Road 7, App. 10, 55768 Hoppstädten-Weiersbach Deutschland

FSL is standing in the market with "3 Best Policy" since the very first day of servicing customers:

Best Service、

Best Quality、

Best Price.

We 100% fully trust that you must enjoy doing business with us!